

## FUME CUPBOARD REMOTE CONTROL

### APPLICATION:

- Wall mounting

### DETAILS:

- Waterflow around 13l/min at 3 Bars pressure
- Test pressure: 9 Bars/air
- Max working pressure: 10 Bars

### SURFACE PROTECTION:

- Epoxy powder coating RAL 7035

### MATERIALS:

- Brass - Copper
- Handle in PP

### HEADWORK SEALING:

- EPDM temperature working range: 0-70°
- CERAMIC temperature working range: 0-70°

### CONNECTION TAP:



- Copper tubes  $\varnothing 10$  or  $\varnothing 12$

### STANDARD AND NORMS:

- EN13792:2000
- DIN12898
- DIN12918
- ISO228/1

### OPTIONS:

- Lever model **LEV001/STI** instead of the handle (to use only with ceramic headwork)
- With chemical nickel plating 17 microns inside

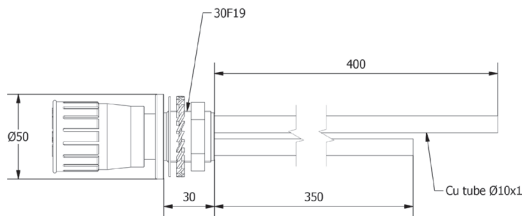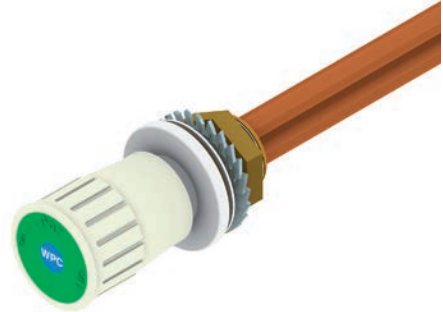

### WEIGHT:

- 648 gr

WARRANTY 2 YEARS