




NUOVA FAR  
Laboratory TAPS

Quality and Design  
think  GREEN

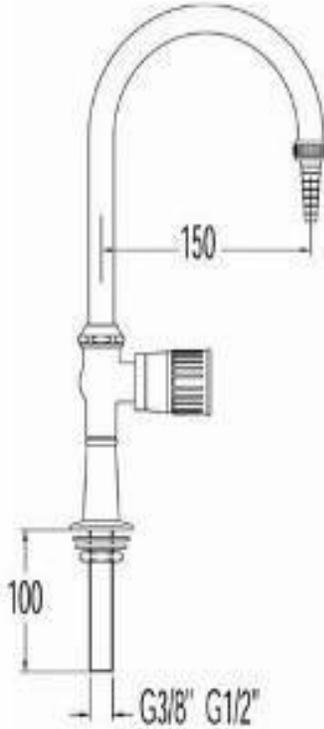

کد: 11080-2

شیرآب رومیزی تکی با خروجی عسانی

و دنباله 100mm

[www.parslab.com](http://www.parslab.com)

**APPLICATION:**

n Bench mounting

**DETAILS:**

n Waterflow around 13l/min  
at 3 Bars pressure  
n Test pressure: 9 Bars/air  
n Max working pressure: 10 Bars

**SURFACE PROTECTION:**

n Epoxy powder coating RAL 7035

**MATERIALS:**

n Brass  
n Handle in PP

**HEADWORK SEALING:**

n EPDM temperature working  
range: 0-70°  
n CERAMIC temperature working  
range: 0-70°

**CONNECTION TAP:**

n Male thread G3/8" - G1/2"

**STANDARD AND NORMS:**

n EN13792:2000  
n DIN12898  
n DIN12918  
n ISO228/1

**OPTIONS:**

n Lever model **LEV001/STI** instead  
of the handle (to use only with  
ceramic headwork)

n With chemical nickel plating  
17microns inside

**WEIGHT:**

n 927 gr

Water taps are supplied with oil  
bath head valve and sealing in  
EPDM.

Nozzle with possibility of  
disassembly in compliance with  
DIN 12898 regulation.

Handles in compliance with  
EN137922000 norm,  
manufactured in ABS; acid  
resistant material.

Threads in compliance with  
ISO228/1 regulation, B tolerance  
class.

Taps are built following the  
DIN12918 norm.

Maximum working pressure 10  
Bar.

[www.parslab.com](http://www.parslab.com)